



STAINLESS STEEL BULLET

**2 x 7/0.127 PTFE TWISTED LEADS.
ENSURE LEADS ARE TWISTED
TIGHTLY.**

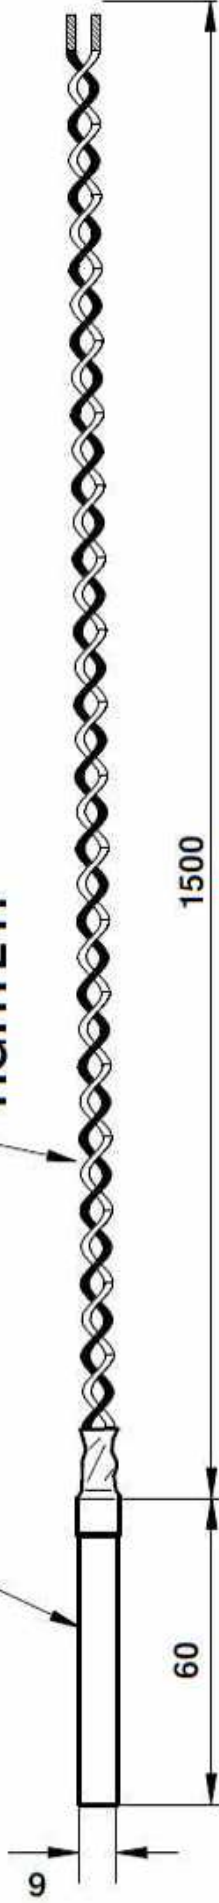

**2 WIRE Pt1000 RTD ass'y
1000 OHMS @ 0 DEG C
CONFORMS BS:EN:60751
MAX TEMP = 200 DEG C**

| | | | |
|-----------------------------|------|------------|-----------------------------------|
| C | LA | 18.1.11 | PARTS LADDER ADDED |
| B | DXR | 5/11/03 | ENSURE LEADS ARE TWISTED TIGHTLY. |
| A | LAA | 15/2/99 | CABLES TO BE TWISTED |
| REV:- | BY:- | DATE:- | REASON FOR REVISION:- |
| DIMENSIONS:- millimetres | | SCALE:- | SDL DRAWING No:- |
| DRAWN BY:- | | DATE:- | REV |
| AJG | | 21/12/1998 | SD00764 |
| TITLE:-Pt1000 Rtd Assembly | | | |

| | |
|---------|-----------|
| PART No | TOLERANCE |
| 2 | CLASS A |
| 1 | CLASS B |

ASPER PT1000B RTD 100C to -200C